



600W | 700W | 800W


The third generation Xilence power supply units - exciting design, latest technology and top quality. In the current revision, every power supply series has been completely revised. The results are not only impressive due to the high-efficiency technology, but also due to the new design and even better equipment. The connections have been coordinated to current systems and due to the increased energy efficiency, the power packages are even cooler and quieter.

- Powerful: Optimal performance in every situation
- Whisper silent cooling: 1x 135mm fan
- Reliable: Maximum stability at all time
- Highly efficient - 80PLUS® bronze certified efficiency

Technical Data

AC INPUT		DC OUTPUT	
600 Watt	240V	+3.3V	26.0A
		+5V	30.0A
		+12V1	20.0A
		+12V2	20.0A
		-12V	0.5A
		+5VSB	3.0A
700 Watt	240V	+3.3V	26.0A
		+5V	30.0A
		+12V1	18.0A
		+12V2	18.0A
		+12V3	20.0A
		+12V4	20.0A
		-12V	0.5A
		+5VSB	3.0A
800 Watt	240V	+3.3V	28.0A
		+5V	30.0A
		+12V1	20.0A
		+12V2	20.0A
		+12V3	20.0A
		+12V4	20.0A
		-12V	0.5A
		+5VSB	3.0A

Cablemanagement

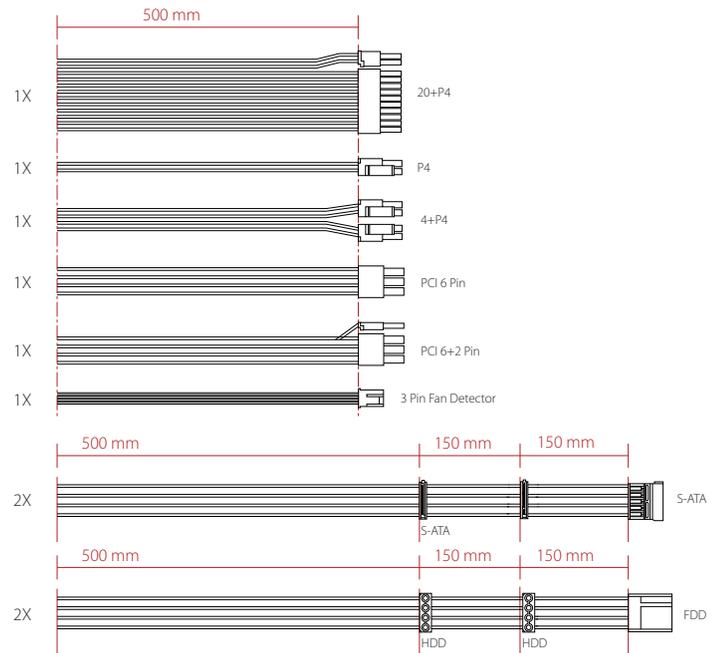

Logistical Data

Item number	EAN Barcode
SPS-XP600.(135)R3	4044953105272
SPS-XP700.(135)R3	4044953105289
SPS-XP800.(135)R3	4044953105296

All trademarks and registered marks are the property of their respective companies. Errors excepted. Subject to change without prior notice. Images may differ from original product.

